

## 70530

### WATER-PROOF CLOTH TAPE

#### "Gaffer's Tape"

11.5 Mil Thickness, Rubber Adhesive, Black

Each roll: 2" x 60 yds,

A high quality, strong cloth-backed tape. Designed for long life applications. Provides excellent protection to autobody parts when sanding, grinding or sandblasting nearby. Moisture resistant and has instant adhesion. Matte finish for less reflectivity and low sheen. Retains flexibility and conformability in both low and high temperature applications.

#### FEATURES & BENEFITS:

- Heavy-duty vinyl coated waterproof cloth backing.
- Natural rubber based adhesive.
- High tack with excellent adhesion for superior performance on a variety of surfaces.
- Excellent flexibility.
- Excellent durability and conformability.
- Retains flexibility and conformability in both low and high temperature applications.
- Matte finish for less reflectivity and low sheen.
- Clean removal - no residue.
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®.

#### CERTIFICATIONS

UL723	Tested in accordance with UL723
LEED	Contributes toward satisfying EQ Credit 4.1 (Low Emitting Materials).


#### PHYSICAL PROPERTIES

Backing	Matte-Finish Vinyl Coated Cloth
Adhesive	Rubber
Color	Black
Specifications	Tested in accordance with UL 723

Measurement (Test Method)	US Value (Metric Value)
Total Thickness (ASTM D-1000)	11.5 mils (0.29 mm)
Adhesion to Backing (PSTC-101)	29 oz/in (32.5 g/mm)
Adhesion to Steel (ASTM D-1000)	50 oz/in (56 g/mm)
Tensile Strength (ASTM D-1000)	42 lb/in (0.75 kg/mm)
Operating Temp.	40 to 200°F (4 to 93°C)
Smoke Developed (UL 723)	5
Flame Spread (UL 723)	15
VOC Content	<1 g/L



Tested in accordance with UL723.

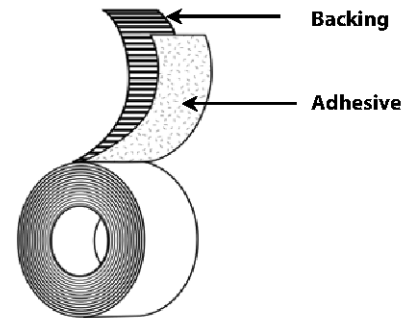

#### APPLICATIONS

- Gaffer's tape.
- Vinyl seat repair.
- Wrapping or bundling wire, metals and plastics.
- Protecting and anchoring electrical wiring.
- Moisture and dust proof sealing of equipment.
- General repair.
- Book binding.
- Protect and anchor wiring in the photography and film industry.

#### STORAGE

Store in a dry location at a temperature between 60°F to 80°F (16°C to 26°C) and 40-60% humidity.

#### PRODUCT AVAILABLE

70530 2" wide x 60 yds., Back

1 per case