
#1511
BRUSHABLE SEAM SEALER

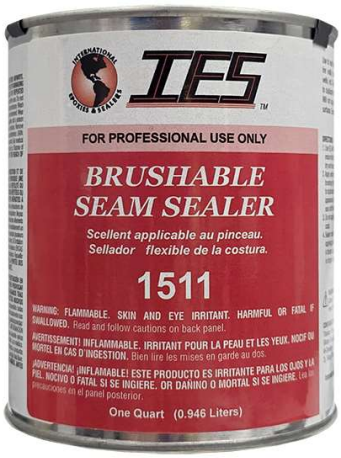

A fast setting, permanent flexible sealant. Used for sealing vertical and horizontal seams and joints on automotive and truck floor pans, trunks, firewalls, lap seams, etc.

MATCHES OEM BRUSHED IN SEALERS

EXCELLENT ADHESION TO PAINTED, BARE OR PRIMED METAL

CAN BE PAINTED OVER IN 30-40 MIN.

SEALS WET OR DRY

BENEFITS

Matches OEM brushed in sealers
Excellent adhesion to painted, bare and primed metal
Seals wet or dry
Non Flow
Easy brush-ability (re-brush-ability possible)
Good brush mark retention
Flexible product when dry
No stringiness
Oil resistant
Seals and protects cracks, crevices, and body seams
Provides flexible finish that won't harden, or crack
Waterproofs and insulates critical areas
Ready for painting in just 30-40 minutes
Off-white color matches various factory settings for a clean, natural look
Applicable on a variety of automotive surfaces
Storage stability - no phase separation

APPLICATIONS

Around shock absorber mountings, inside trunk, on floor, around battery, door skin/frame sealers with low thickness. Sealing seams that are spot welded or bolted to provide masked steel overlaps with original design and good watertight protection.

TECHNICAL DATA

Color	Off-White
Viscosity (Severs)	33 - 37 seconds
Specific Gravity	1.87 estimated
Flash Point	39.2°F T.C.C.
Shelf Life	1 Year
Base	Styrene Butadiene blend with Hydrocarbon Resins

DIRECTIONS

1. Use IES #4700 or #1780 to ensure that the surface is clean, dry and free of contaminates.
2. Apply uniform coat of sealant, brushing in the same direction to duplicate the original appearance. For best results, use a stiff wire-type brush.
3. Do not apply more than two coats.
4. Sealer must be dry before applying paint over the sealer. A thicker application could result in longer drying times.

PRODUCT AVAILABLE

1511	Quart Can	4 per case

NOTICE TO PURCHASER: The following warranty is in lieu of all other expressed or implied warranties, specifically all goods are manufactured of first class materials and by competent professionals. We have no control over the use and application of our products. Our liability shall not exceed the purchase price.